

ULTRA

Area Light 80W

The EVO Ultra Area series is a compact flood light, based on the ultra fixture system. Slim form factor design with excellent heat dissipation and high weather protection. Great for tunnels, car parks and other outdoor areas.




7 YEAR WARRANTY

TECHNICAL SPECIFICATIONS

Model Code	EVO-UAL-80
LED Chip	Nichia
Efficiency	110 lm/W
Lumens	8,800 lm
Colour Temperature	5000K (4000K Optional)
Beam Angle	60° × 90°
CRI	70 Ra
Total Power Consumption	80 W
LED Power Consumption	72 W
Power Frequency	47-63 Hz
Power Factor	0.95
Power Efficiency	91%
Input Voltage	AC 100-277V
Output Voltage	DC 48-56V
Output Current	1.3A (Constant current)
Lifespan	100,000 hrs TM-21 (L70)
IP Rating	IP65
Weight	7.0 kg
Dimensions	L315 × W360 × H90 mm
Operating Temperature	-40° to 55° C
Operating Humidity	15-90% relative humidity



DIMENSIONS

Measurements : mm

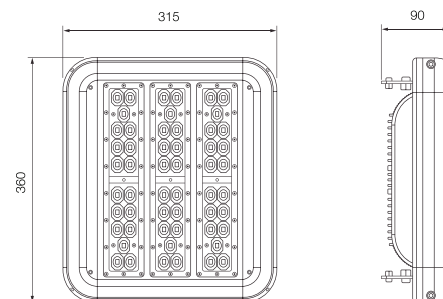

LIGHT DISTRIBUTION

Type : Rectangular Flood

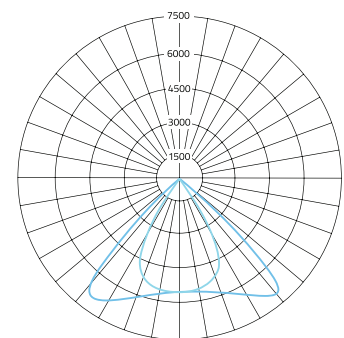

Specifications are subject to change without notice.
 Specification Report Date: 15/5/2017
 © Copyright 2017 EVOLUTION LIGHTING All rights reserved

Sydney (Head Office)
 P: (+612) 9868 7049
 E: sales@evolutionlighting.com.au